

WiLink Station

MILLITRONIC

低遅延双方向ワイヤレス映像信号伝送

製品特徴

- IEEE802.11ax Wi-Fi 6 搭載、高速双方向ワイヤレス通信、最大データレート1.2 Gbps
- 低遅延双方向映像信号伝送、1080p@60HzフルHD解像度をサポート
- WiFiインターネットサービスのアクセスポイントに接続したまま、ホストコンピューターがワイヤレス映像、データの送受信を同時に行える。
- USBワイヤレスドocking機能はマウスやキーボード、USB Webカメラ、SSDなどの様々なHID (ヒューマン・インターフェイス・デバイス) の利用が可能



双方向
M U - M I M O

Wi-Fi 6
IEEE 802.11ax

Wi-Fi 6 技術

1080p
FULLHD


1080p@60Hz



インタラクティブ
タッチスクリーン




OS Windows 10



最大伝送距離
20メートル



プレゼンテーションする時に、HDMIケーブルを接続する必要がなく、WiLink Station 一台があれば誰でも簡単にディスプレイと接続ができます。

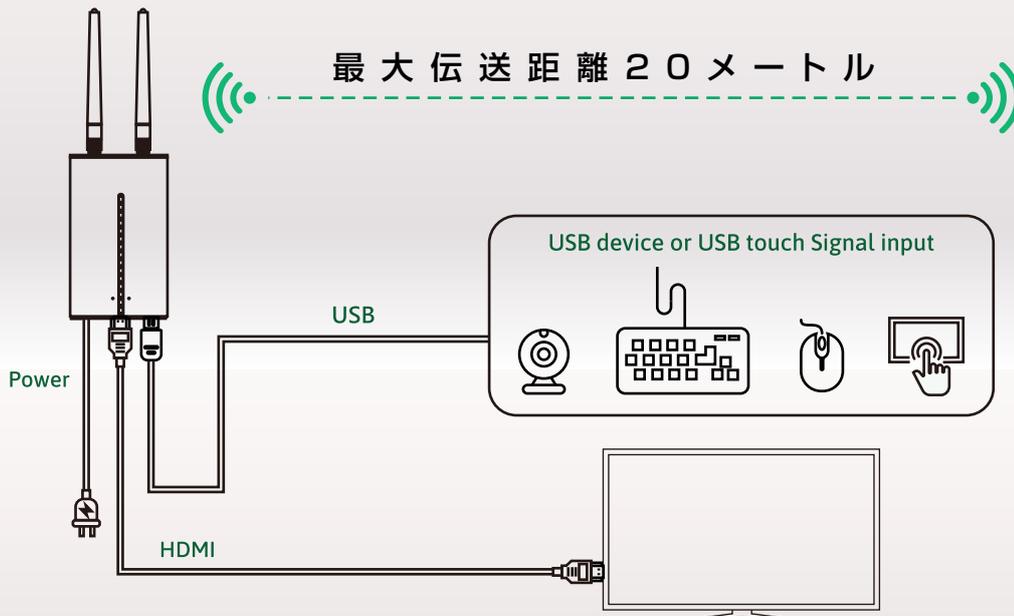

製品動画

Wi-Fi 6メディアサーバモジュールは、映像情報と共にワイヤレスタッチ制御信号もサポートします。無線通信の動作距離内で、ユーザはタッチスクリーンを直接使用してコンピュータをリモートで制御できるため、高速双方向インタラクティブマルチメディア伝送アプリケーションを実現できます。さらに、ワイヤレス接続されたコンピュータでWi-Fi同時操作を可能にします。モジュールにワイヤレス通信している間、コンピュータはアクセスポイント(AP)に接続されたままWi-Fiを介しインターネットへアクセスすることが出来ます。

この無線伝送モジュールは、モニタやタッチパネルなどの製品に対応、Wi-Fi 6 ネットワークを使用してUSBワイヤレスドッキング機能を備えて、低遅延の双方向ワイヤレス映像信号伝送を可能にします。



使用分野

双方向映像信号伝送方式は煩わしい配線が不要、ディスプレイ、マウス、キーボード、Webカメラなどの端末が簡単に設定できます。教育、デジタルサイネージ、オフィスなどさまざまな分野で活用いただけます。



ホワイトボード



サービスエリア




オフィス



デジタルサイネージ

製品仕様

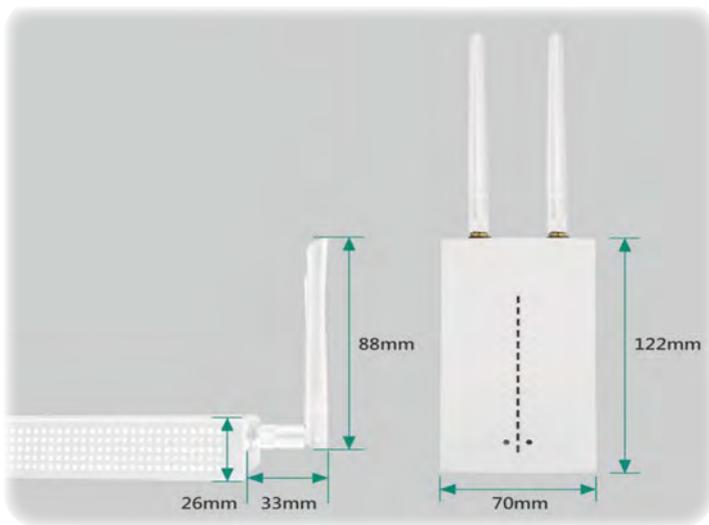

Networking	
Standard	IEEE 802.11ax ; IEEE 802.11ac
RF Frequency	5GHz
Data Rate	Up to 1.2Gbps
Conducted Power	15dBm@MCS1 6.5dBm@MCS11
Frequency Band	5GHz U-NII-1 36, 40(default), 44, 48 5GHz U-NII-3 149, 153, 157, 161
TX / RX Streams	2x2
Interface	1 x USB 2.0 Host & 1 x HDMI 1.4 output
Power Consumption	5W
Power Supply	DC input 12V1A@12W
Certifications	FCC, TELEC
Supported Operating System	Windows 10 (or later)
Environmental	
Operating Temperature	-10 - 50C (±5%)
Storage Temperature	-20 - 60C (±5%)
Humidity	Operating Mode: 0%~85%, non-condensing Storage Mode: 0%~90%, non-condensing
Physical Properties	
Weight	130g
Dimensions (L x W x H)	122 x 70 x 26 mm (without antennas)

輸入代理店:立誠実業株式会社
〒143-0016 東京都大田区大森北
1-11-3アイリス大森シティ 601号室
電話:03-3762-9470
<http://holy-hli.co.jp/>



MIT

MADE IN TAIWAN

NOTE: Products and specifications subject to change. All images shown are for illustration purposes only and may not be an exact representation of the product. Millitronic reserves the right to change product images and specifications at any time without notice.